



USER MANUAL

7" VIDEO DOOR PHONE INDOOR STATION



Hands Free
Intercom



Sensor Button



Monitoring
Function



Remote
Unlocking



100° Wide
View Angle



Day/Night
Vision

DOWNLOAD NOW



OzoLife iOS



OzoLife Android



OzoLife

WWW.OZONESECUTECH.COM

EMAIL ID: INFO@OZONESECUTECH.COM | CUSTOMER CARE: +91-9310012300

INDEX



<u>Description On Indoor Unit</u>	1
<u>Wiring Diagram</u>	2
<u>Wiring Connection</u>	3-4
<u>Menu Operations</u>	4-8
<u>Operation Introduction</u>	9
<u>Install the Door Unit</u>	10
<u>Warranty Card</u>	12

DESCRIPTION ON INDOOR UNIT




No.	Name	Description
1		Power LED
2	1 2	Door 1-LED, Door 2-LED
3		Taking
4		Monitoring the Door and Camera Images
5		Gate Unlock
6		Hang up Buttons
7		Door Unlock
8		Up or increase, use for adjust parameters
9		System parameter settings
10		Down, use for adjust the parameters

WIRING DIAGRAM

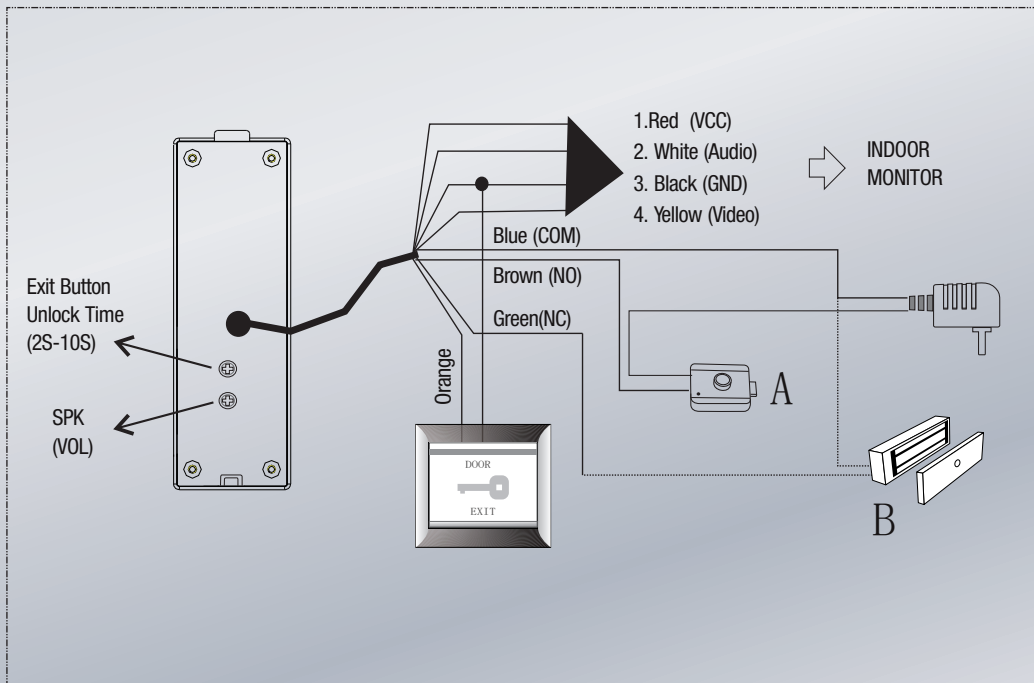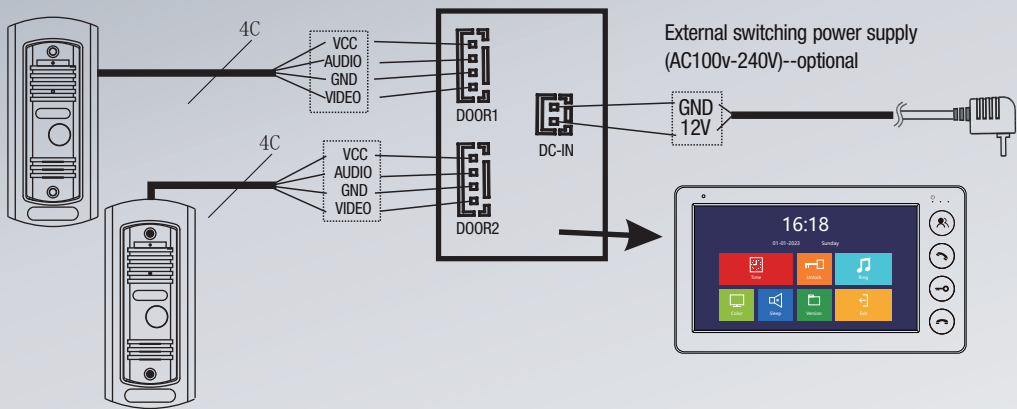

WIRING CONNECTION

- ❶ The electric lock/source/camera is not included in the package, you can purchase an electric lock which is suitable for actual requirement.
- ❷ In the standard system support normally open(NO) or normally closed(NC) unlock mode to unlock
- ❸ Indoor monitor power with a built-in power or an external power optional. Please refer to actual control using. If the indoor monitor with a built-in power source, applicable to wide voltage range(AC100V-240V). Please first pull out the AC power plug before installation of device(shown as below).



- ❹ Use and selection of wire, please refer to the following.


1. 4C ordinary unshielded and shielded wire connection mode:

Distance < 28M (0.3mm); Distance < 50M (0.5mm); Distance < 100M (1mm)




2. 3C ordinary unshielded + video wire (75-3) connection mode:

Distance < 100M (SYV-75-3+3C:1mm)

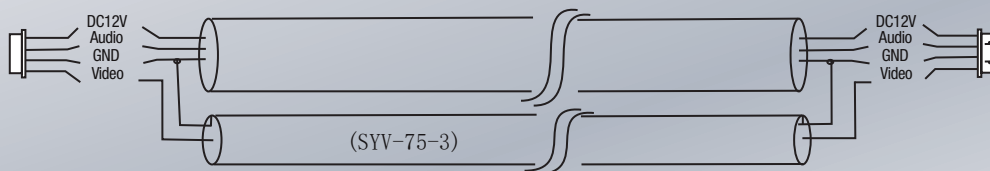

3. CAT5 or CAT6 network cable connection mode: (Not recommended) Distance < 28M



Note: Each pair of twisted pair is used as one

MENU OPERATIONS


In the standby mode, press the icon  to enter the function parameter setting, as shown below:



Time setting as below picture shown:




Standby mode: option : Off/Clock
Default: Off

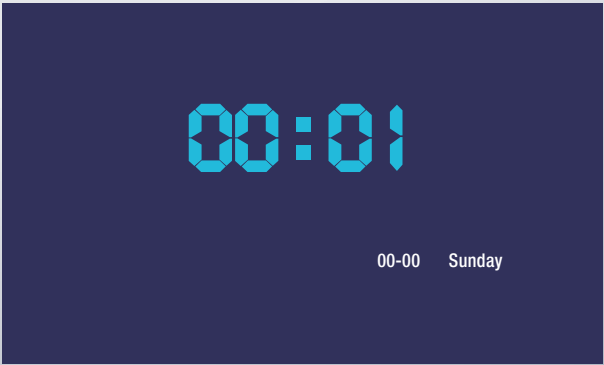


Unlock door relay time settings:Unlock door relay time settings:


- ➊ Set door 1 unlock time: 2S, the selection range is 2S-10S
- ➋ Set door 2 unlock time: 2S, the selection range is 2S-10S

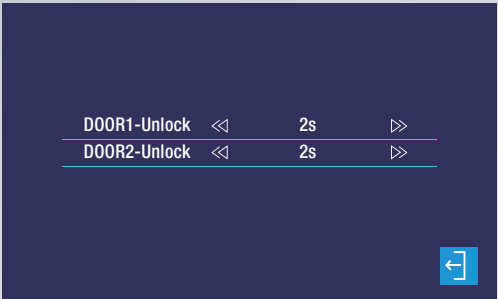


Ringtone Setting:
Ringtones : 36
Ringtone volume : 0-10 adjustment
Default volume : 6

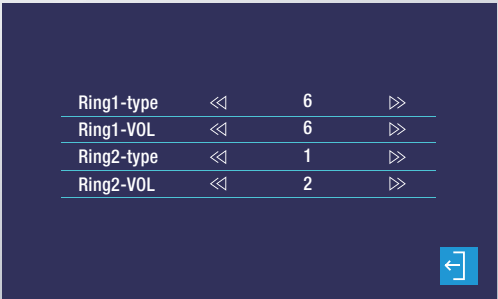

Color adjustment:
Adjust screen parameters: brightness, contrast, saturation

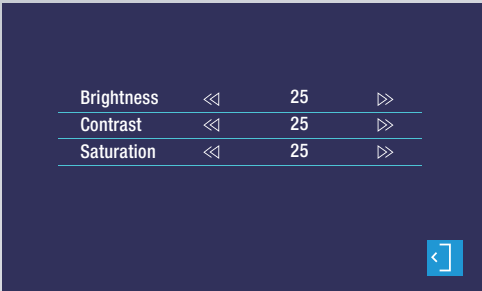

Sleep Mode Setting:

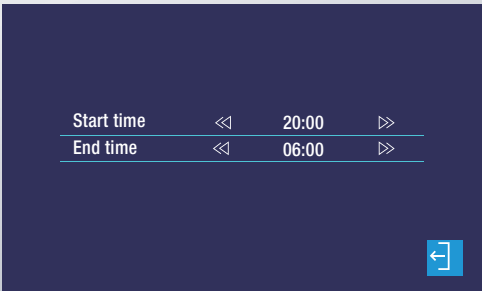

Software Version Info:

Version	20220215V03
---------	-------------



OPERATION INTRODUCTION

CALL MODE



Visitors press the call button on the call panel

▼ Indoor monitor and call panel will ring in the same time

▼ The visitor's image automatically display on the screen



Press the talking button on indoor monitor Stop ringing

▼ Start conversation with visitors(conversation120s)



Press the unlock button on indoor monitor

▼ Release the door lock



Press the hang up button on indoor monitor

▼ End

MONITORING MODE



Indoor Monitor

▼ Displays the image of the Indoor monitor

▼ The visitor's image automatically display on the screen



Press the talking button on indoor monitor Stop ringing

▼ Start conversation with visitors (conversation120s)



Press the unlock button on indoor monitor


▼ Release the door lock



Press the hang up button on indoor monitor

▼ End

INSTALL THE INDOOR UNIT

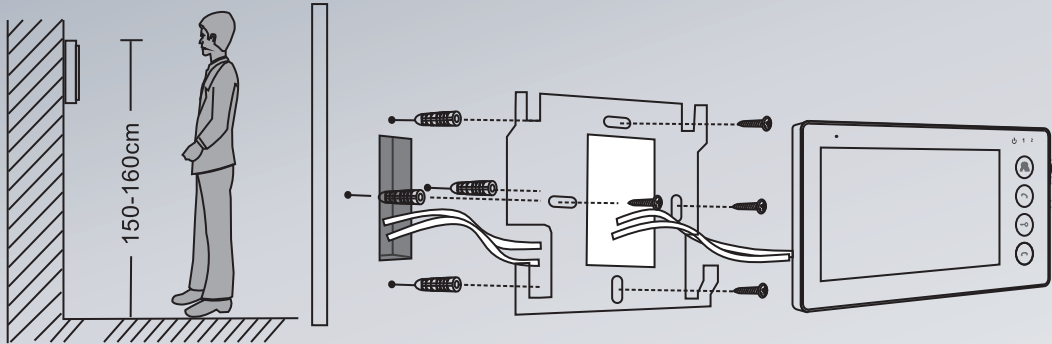

SPECIFICATION

Display screen	7" TFT
Definition	7"(1024X600/800X480)
Standard	PAL/NTSC
Calling mode	Two-way conversation
Calling time	120S
Standby current	Maximum 250MA
Work current	Maximum 600MA
Power supply	External switching power Supply(DC12V)--Optional Built-in power Supply-Optional
Work temperature	-10~+40 C
Installation way	Surface mounting

[illegible]

WARRANTY CARD



CUSTOMER DETAIL			
Name		Address	
Mobile No.			
E-Mail ID			
City		Landmark	
State		Pin Code	

PRODUCT PURCHASE DETAIL				
Digital Door Lock			Dealer Name & Address	
Model No.				
Online / Offline			Installation Address	
Serial No.				
			Invoice No.	
			Total Quantity	

Serial No.	Floor No.	Flat No.	Warranty No.	Remarks

Customer Signature:

Technician Signature:

Date:

Special Instructions:

- Read this manual carefully before installation and keep it safe, for future reference.
- If there is any doubt or disputable regarding information in this manual, you can call our company for clarification.
- There maybe some difference between the description provided here and tha actual devices, as our products are constantly developing and upgrading. We apologize if this manual does not contain all of the latest updates.

