

SECUREASY

ULTIMATE SECURITY. UNMATCHED EASE.

SMART CAMERA

USER MANUAL



KEY FEATURES



Cloud
Storage



Motion
Detection



Two-Way
Communication



FHD 1080p
Camera



Google Nest/
Alexa

DOWNLOAD NOW



CALL BY IOS



CALL BY ANDROID





INDEX

1. Product Introduction

Description

2. Installation

What's in the box

Connection

QR code configuration

Settings

2. Function

3. FAQs



4. Guarantee



DETECTS MOTION. DELIVERS SAFETY.

Now ensure better safety for your loved ones with P2P fixed cameras from Ozone. Featuring person to person motion detection and remote access, these Wi-Fi enabled smart cameras swiftly notify whenever a motion/person is detected in the house via mobile app. Besides, its innovative two way communication allows you to have clear & loud conversation. What's more, its infra-red night vision allows you to keep a watch on every corner of your house, inside or outside, even during the night. So you enjoy unmatched security and complete peace of mind, anytime, anywhere.

DESCRIPTION



DESCRIPTION

POWER DC5V \pm 10%

STATUS LIGHT

- Solid red light on: Camera is malfunctioning
- Blinking red light (fast): Awaiting Wi-Fi connection
- Solid blue light on: Camera is running
- Blinking blue light: Camera is trying to connect

MICROPHONE Capture sound for your video


SD CARD SLOT Support local SD Card storage (Max.128GB)

RESET Press and hold on for 5 seconds to reset the camera (if you have modified settings, it will return to factory defaults)

INSTALLATION

MODE 1


Stick the adhesive tape in the middle of camera bottom



INSTALLATION

MODE 1

Put the camera on a clean surface

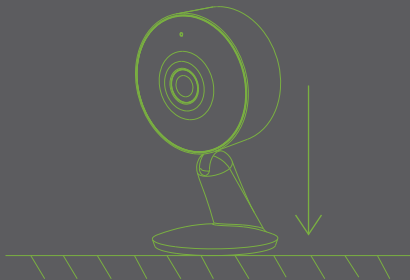

WHAT'S IN THE BOX

CONSULT THE CHECKLIST BELOW FOR ALL COMPONENTS



FIXED CAMERA




POWER ADAPTER

WHAT'S IN THE BOX



USB CABLE



3M



MANUAL

CONNECTION

DOWNLOAD

OzoLife is available for both iOS and Android OS. Search the name 'OzoLife', in App Store or Google Play, or scan the QR-Code to download the App

SUPPORTS



iPad



iOS



Android



Download App (iOS & Android)

CONNECTION

SET UP ROUTER

The router only supports 2.4GHz Wi-Fi (doesn't support 5GHz). Please set the parameters of the router before connecting to the Wi-Fi network, and record the SSID and password of your Wi-Fi.



Please keep network available

2.4GHZ





5GHZ



REGISTRATION PROCESS


STEP 1

Open the OzoLife App, click "Register", read the "Privacy Policy" and click "Agree".

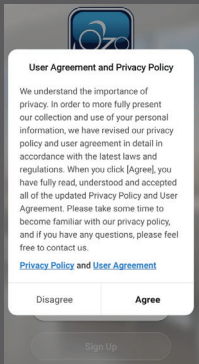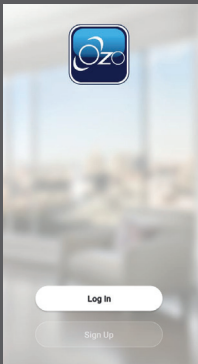

STEP 2

Enter a legal and valid mobile number or email address and click "Continue".
Enter the Verification Code received to log into the app.




Register

India

Email

Get Verification Code

The 'Register' screen features a white background with a dark grey header. Below the header, there are two input fields: one for 'India' and one for 'Email'. A blue button labeled 'Get Verification Code' is positioned at the bottom of the form area.





Verification Code

Verification code has been sent to: admin@gmail.com,
Resend (56s)

The 'Verification Code' screen has a white background with a dark grey header. Below the header, there is a dashed line representing the code input area. At the bottom, there is a message: 'Verification code has been sent to: admin@gmail.com, Resend (56s)'.



QR CODE CONFIGURATION

- 1 Open the Ozolife App. Click on "Create Family" and then customize the family name and related settings.





QR CODE CONFIGURATION

- 2 Continue to click "Video Surveillance" >> "Smart Camera", and then choose "Add Device" or "+", to add camera.



QR CODE CONFIGURATION

- 3 On the "Add Device" interface, continue to click on "next step". Enter your Wi-Fi password when prompted.



Note:

- 1) Camera only supports 2.4GHz WiFi network.
- 2) The number of bits in the SSID and passwords of the router should not exceed 24 digits.

QR CODE CONFIGURATION

- 4 Scan the QR code on your phone with the camera on your fixed camera. Once you hear the beep, proceed to complete the configuration.

Scan with the camera

When you tap CONTINUE, the mobile phone displays a QR code. Hold the camera 15 to 20 cm in front of the mobile phone for the camera to scan the QR code.



15~20cm

Continue



Heard nothing at all

Heard the beep

QR CODE CONFIGURATION

- 5 When connecting, you should make sure your router, mobile and camera are as close as possible. When camera is added successfully, click "✔". You can also customize the camera's name.

Connecting

Make sure your router, mobile, and device are as close as possible



- ✓ Device found
- ✓ Register device to the smart cloud
- ✓ Initializing device

Device added successfully



Smart Camera 

Living Room

Bedroom

Second...edroom

Dining Room



Kitchen

Study Room

Completed

SETTING

In the "Smart Camera" interface, click (), to set the common camera functions.



FUNCTION

VIDEO FLIP

Flip your video stream vertically anytime for maximum flexibility.

MOTION DETECTION

Motion sensors send an instant notification whenever movement is detected.

RECORD

Record every moment using high capacity SD card storage.

DAY & NIGHT

Powerful night vision means no interruptions, even in complete darkness.

FUNCTION

DAY



NIGHT



Q: The device cannot be previewed properly?

A: Check whether the device is connected to the network. Place the device close to the router, and if it is still not working, reset the device and add it again.

Q: Why is it still in the list of devices after resetting?

A: The reset button only resets the network configuration of the device, but cannot change the configuration on the App. To remove the device, it must be deleted from the App manually.

Q: How to move the camera network to another router?

A: First remove and reset the device on the App and then configure the device again using the App.

Q: Why doesn't the device identify the SD card?

A: It is recommended to plug in the SD card after a power cut. Confirm whether the SD card is normally available and is in FAT32 format. The TF card can't be identified when the internet connection is fluctuating.

Q: Why I can't get the notifications on my mobile App?

A: Please confirm that the App has been running on the phone, and the relevant reminder function has been opened; message notification and authority confirmation in the mobile phone system have been opened.

WARRANTY

Customer Name:

Customer Contact No.:

Purchase Date:

Product Name:

Product Serial No:

Signature/ Dealer stamp:

Note:

1. Please keep this card handy with you, whenever you need warranty service.
2. One-year warranty from the date of purchase, is provided by us.
3. This warranty service is valid for customers in any country across the world.

Special Instructions:

- Read this manual carefully before installation and keep it safe, for future reference.

